

BP-3 | BP-11

Sealing, coding and cutting unit
for preformed suppositories / ovules.

3 OPERATIONS, JUST ONE MACHINE – THOUSANDS OF UNITS SOLD. THEY ARE THE BP-2/BP-10 COMPLEMENTARY UNITS. DESIGNED FOR LABS, SMALL BATCH PRODUCTIONS AND PHARMACIES. THESE MACHINES ARE REALLY COMPACT AND THEY CAN BE POSITIONED ANYWHERE. **BP-3 / BP-11** COMPLETE THE PRODUCTION CYCLE PROCESSING THE SEALING – CODING – CUTTING PHASE.



THE SEALING PROCESS IS PERFORMED BY HEATING IMPULSE AND THE CODING PHASE IS PROCESSED BY 2 DIFFERENT KIND OF SYSTEMS (UPON REQUEST) WHICH ARE THE EMBOSING CODING AND THE THERMIC ONE. THE CUTTING PHASE IS COMPOSED BY 2 MAIN OPERATION: THE TRIMMING CUT AND THE FINAL CUT. THE TRIMMING CUT IS PROCESSED BY AN HORIZONTAL BLADE WHICH AUTOMATICALLY CUTS THE SHELLS' TOP EDGE. CONCERNING THE FINAL CUT, THIS PHASE IS PROCESSED BY A VERTICAL BLADE AND THE OPERATOR CAN SET THE STRIP NUMBER (THE MIN. STRIP IS COMPOSED OF 2 SHELLS).

OPERATIVITY:

AUTO

CODING:

**EMB
OSS
ING**

OR

THERMIC

MODELS


BP-3

A really compact solution to end the production cycle started with the filling. **BP-3 processes up to 3600 shells/h.** No parts are in contact with the product and with an excellent design, it is really easy to setup. Same parts to process suppositories and ovules (no change parts needed).



BP-11

This model is the larger version of the BP-3. **The BP-11 processes up to 6000 shells/h.** Using its touch screen the setting will never be a problem (friendly user interface). It is possible to set parameters like pre-heating, heating temperature, heating time and more.

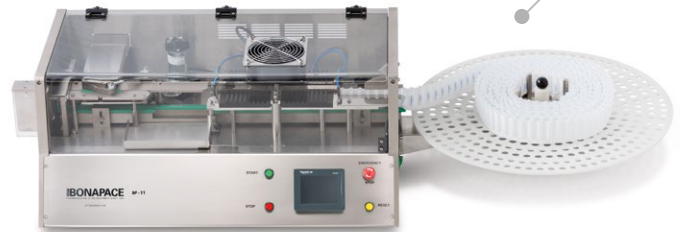

RELATED MACHINES

+ BP-2 FILLING UNIT



+ CU-2 COOLING UNIT



+ BP-10 FILLING UNIT



+ CU-4 COOLING UNIT



+ HIGH SPEED LINES ALSO AVAILABLE (UPON REQUEST)

+ THERMOFORMING MACHINES ALSO AVAILABLE (UPON REQUEST)

TECHNICAL DATA

BP-3

• SIZE	1300 x 550 x 300 H. mm
• NET WEIGHT	35.00 Kg
• CONTAINERS FILLED	Suppositories - Vaginal ovules
• ELECTRIC VOLTAGE	230 V - 50/60 Hz - single-phase
• ELECTRIC ABSORPTION	320 W

BP-11

• SIZE	1300 x 550 x 300 H. mm
• NET WEIGHT	40.00 Kg
• CONTAINERS FILLED	Suppositories - Vaginal ovules
• ELECTRIC VOLTAGE	230 V - 50/60 Hz - single-phase
• ELECTRIC ABSORPTION	480 W

DOTT. BONAPACE
PHARMACEUTICAL & LAB EQUIPMENT SINCE 1946

DOTT. BONAPACE & C. srl
Via A. Merli 10/A
20095 Cusano Milanino
Milano - Italy

Phone +39 02 33122.1
info@dottbonapace.com
www.dottbonapace.com
C.F./P. IVA/VAT N° IT 00720310150

Follow us on

